


New eco-friendly

- SCP*3
- CMK2
- CMA2
- SCM
- SCG**
- SCA2
- SCS2
- CKV2
- CAV2/
COVPIN2
- SSD2
- SSG
- SSD
- CAT
- MDC2
- MVC
- SMG
- MSD/
MSDG
- FC*
- STK
- SRL3
- SRG3
- SRM3
- SRT3
- MRL2
- MRG2
- SM-25
- ShkAbs
- FJ
- FK
- Spd
Contr
- Ending

New easy-to-use SCG Series ($\varnothing 32$ to $\varnothing 100$)

Port and needle on the same side

Air supply/exhaust port and cushion needle installation on the same side. Cylinder installation/adjustment, etc., are easier.

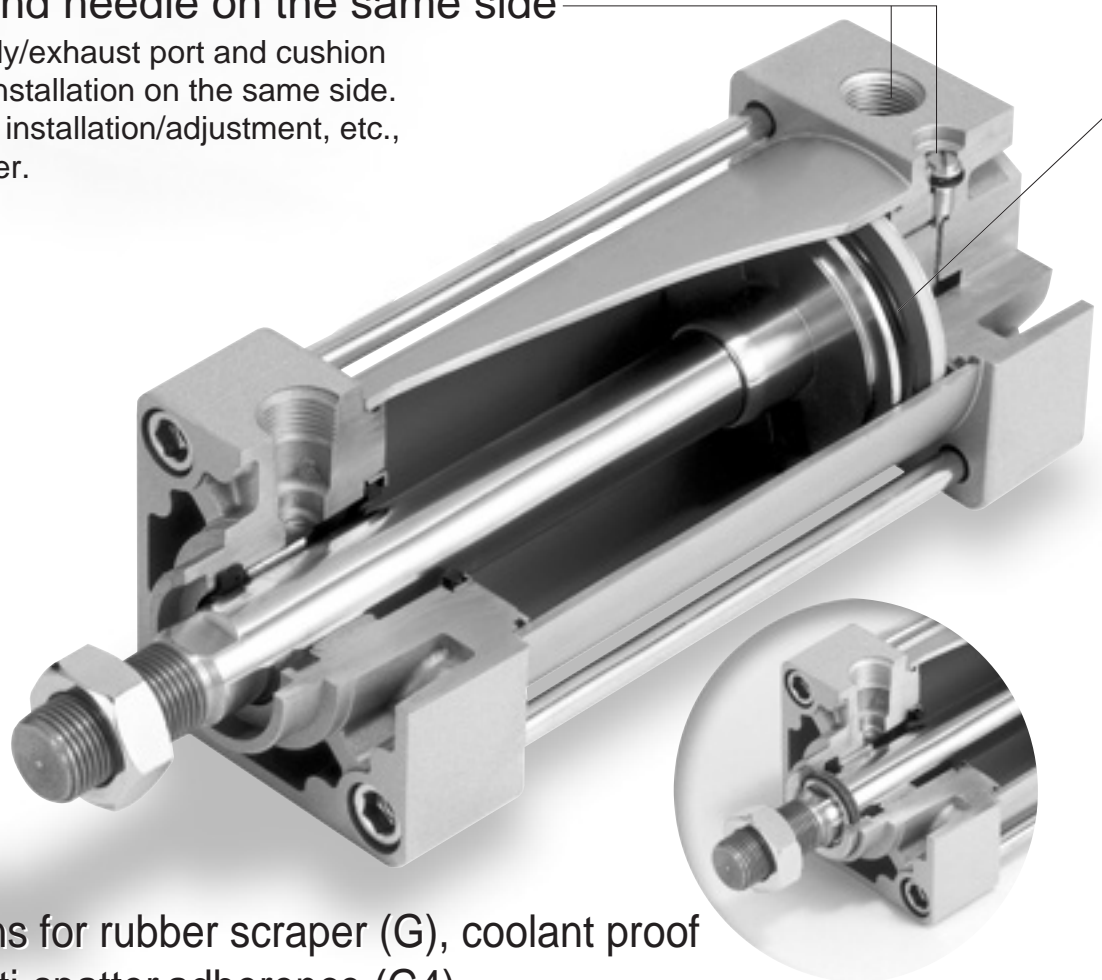

Same dimensions for rubber scraper (G), coolant proof (G2, G3) and anti-spatter adherence (G4)

The dimensions of the rubber scraper and anti-spatter adherence are the same as the standard, facilitating installation.

RoHS


Directive-compatible Tie rod Cylinder

SCG Series

guided cylinder

Compact switch

T switch is smaller than the conventional switch, eliminating switch protrusion in installation and saving space.

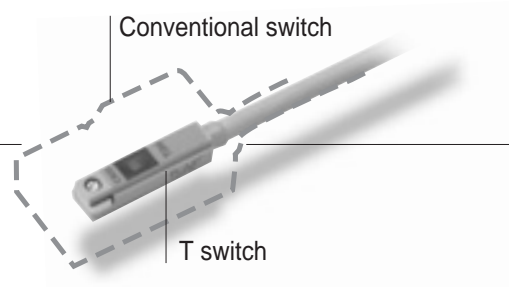

Standard magnets

Switches can be installed on all products.

Space-saving

Less installation space with cylinder up to 40 mm shorter than the conventional cylinder.

White

Products match a variety of equipment with a uniform white exterior.

SCG Series Products

	Model variation	Image	Bore size						Stroke length (mm)
			ø32	ø40	ø50	ø63	ø80	ø100	25 to 500
Standard	SCG		●	●	●	●	●	●	●
Position locking	SCG-Q		●	●	●	●	●	●	●
Low speed	SCG-O		●	●	●	●	●	●	●
Low friction	SCG-U		●	●	●	●	●	●	●
Double rod	SCG-D		●	●	●	●	●	●	●
Non-rotating	SCG-M		●	●	●	●	●	●	●
Rubber scraper	SCG-G		●	●	●	●	●	●	●
Coolant proof	SCG-G2, G3		●	●	●	●	●	●	●
Anti-spatter adherence	SCG-G4		●	●	●	●	●	●	●

- SCP*3
- CMK2
- CMA2
- SCM
- SCG**
- SCA2
- SCS2
- CKV2
- CAV2/COVP/N2
- SSD2
- SSG
- SSD
- CAT
- MDC2
- MVC
- SMG
- MSD/MSDG
- FC*
- STK
- SRL3
- SRG3
- SRM3
- SRT3
- MRL2
- MRG2
- SM-25
- ShkAbs
- FJ
- FK
- Spd Contr
- Ending