


INSULATED BULLETS & RECEPTACLES • BUTTS, WP-TYPE

No heat required.

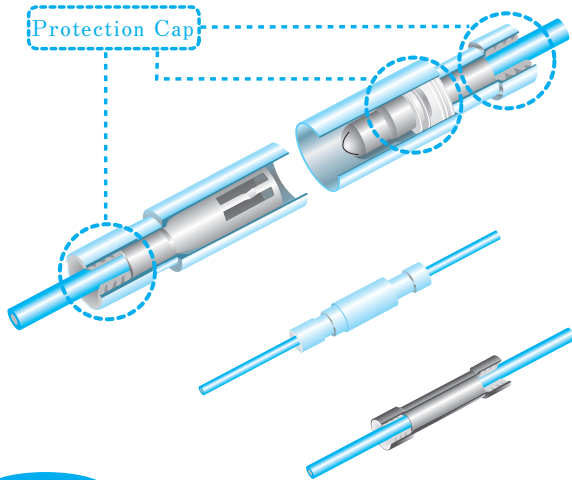

SPECIFICATION

- RATED VOLTAGE 300V
- RATED CURRENT




WIRE SIZE	PC	TMNB
1.25mm ²	15A	19A
2mm ²	20A	27A

- FLAME RETARDANCE UL94V-2
- INSULATOR TEMPERATURE - 40°C ~ + 105°C
- PROTECTION IP57 (IEC529)

RoHS 10



See page 2

INSULATED BULLETS/RECEPTACLES, WP-TYPE

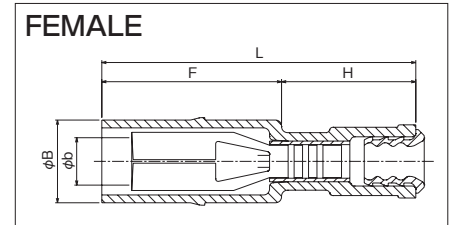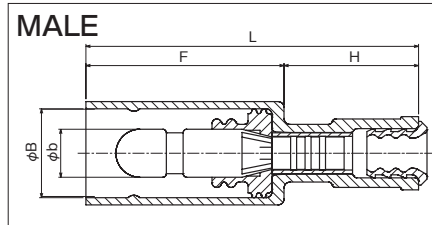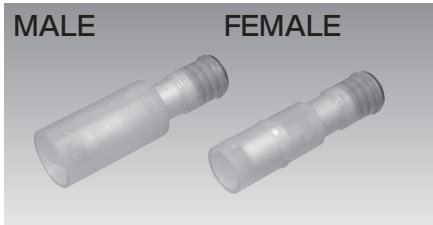

PART NUMBER	DIMENSIONS mm					WIRE RANGE			TOOL No.	INS	STD COLOR	STD QTY/BOX
	φb	φB	L	F	H	STRANDED mm ²	AWG	WIRE OUTSIDE DIAMETER				
PC 4009-M-WP	4.0	7.4	27.7	16.5	11.2	0.75 1.25	18-16	φ2.6 φ3.2	NH 64	Nylon	RED TRANSLUCENT BLUE TRANSLUCENT	1,000 (100×10)
PC 4009-F-WP	3.9	6.9	26.2	15.0								
PC 4020-M-WP	4.0	7.4	27.7	16.5		2.0	14	φ3.0 φ3.6				
PC 4020-F-WP	3.9	6.9	26.2	15.0								

INSULATED BUTT CONNECTORS, WP-TYPE

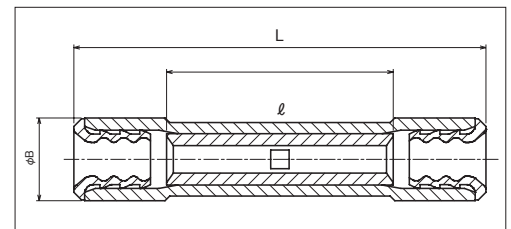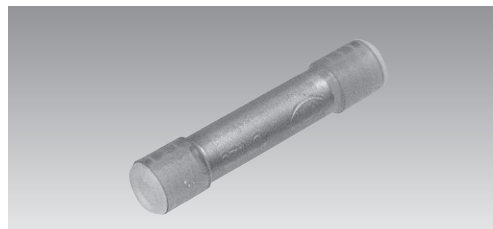

RoHS 10

See page 2

PART NUMBER	DIMENSIONS mm			WIRE RANGE			TOOL No.	INS	STD COLOR	STD QTY/BOX
	L	φB	ℓ	STRANDED mm ²	AWG	WIRE OUTSIDE DIAMETER				
TMN B-1.25-WP	26.9	5.4	15.0	0.5 ~ 1.25	20-16	φ2.5 ~ φ2.9	NH 64	Nylon	RED TRANSLUCENT BLUE TRANSLUCENT	1,000 (100×10)
TMN B-2-WP		6.1								